


G5 Wrapper

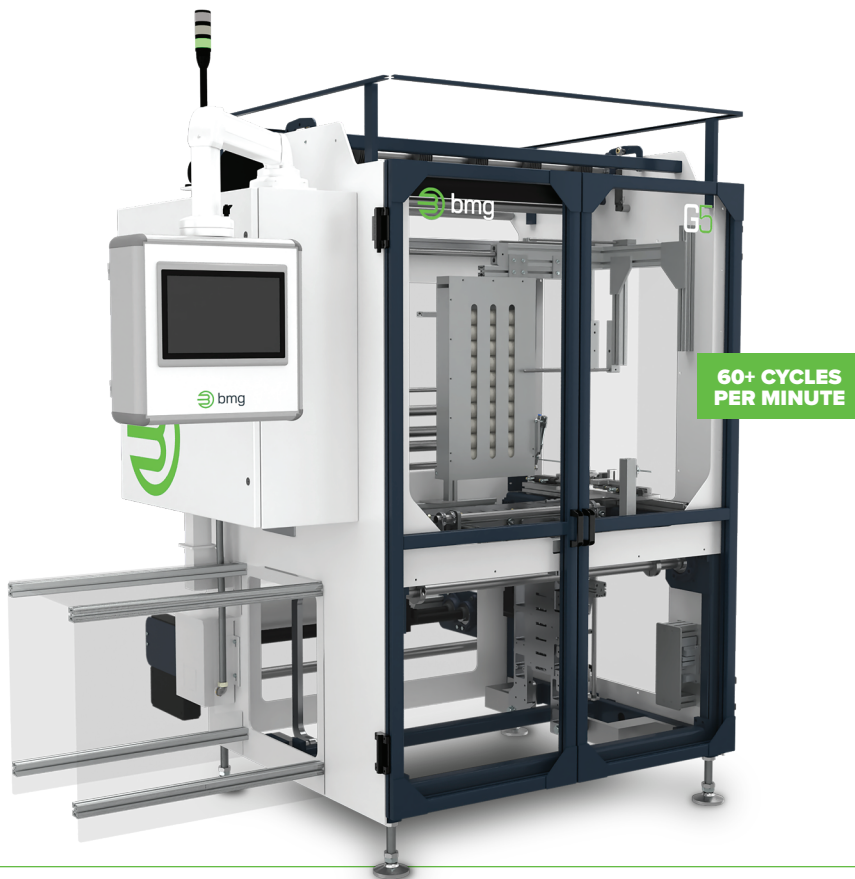

Introducing the new G5 wrapper from BMG. Increased speed, efficiency, precision, and reliability.

The new BMG G5 wrapper is an automated wrapping system that utilizes a servo-driven jaw assembly for **industry-leading faster cycle rates and increased precision**, servo film feed, and fixed-length crank arms — **achieving industry-leading 60+ cycles per minute and eliminating the existing adjustment points that can lead to issues when adjusted improperly**. The G5 wrapper is available in various seal assembly configurations to make horizontal seals from 20" x 66" and vertical seals from 14" x 28" with an adjustable seal assembly opening of 6" to 24".

With rugged low-maintenance construction, the G5 wrapper offers modern innovation and versatility. All BMG wrappers are capable of sealing polyethylene, polyolefin, bubble, and poly mailing utilizing our patented low-temperature sealing system without the need to change parts. BMG provides custom-designed in-feeds and discharge options to meet individual requirements. From a simple hand-loaded wrapper to complete automation, including counting, collating, orienting, and case erecting/loading — **BMG has a solution for you.**

FEATURES

- High-speed, lighter servo-driven jaw assembly for **increased precision and INDUSTRY-LEADING 60+ CYCLES PER MINUTE**
- **Easy Film Threading** allows for quick changing of film rolls, reducing downtime, simplifying training, and helping you keep your packaging lines running at peak efficiency
- Fixed-length crank arm assemblies **prevent potential incorrect jaw adjustment — no adjustment points needed**
- Servo film feed standard
- **Consistent and durable film drive system** with print registration standard
- Improved / simplified controls **for easier setup and operation**
- Larger screen with intuitive UI with **fault indications onscreen allowing you to identify fault causes**
- **Fully guarded** with top dust cover standard
- BMG patented **low-temperature seal system for consistent, strong seals**
- Trimmed or trimless seal assemblies
- Operator and maintenance manuals via UI
- Horizontal seal lengths from 20" to 66"
- Vertical seal lengths from 14" to 28"
- Jaw assembly openings from 6" to 24"
- Scrap wind system available
- Large-capacity powered film unwind cradle



Shaping **next.**



Seeing is believing.

See the G5 Wrapper in action.